




EXPLODED VIEW

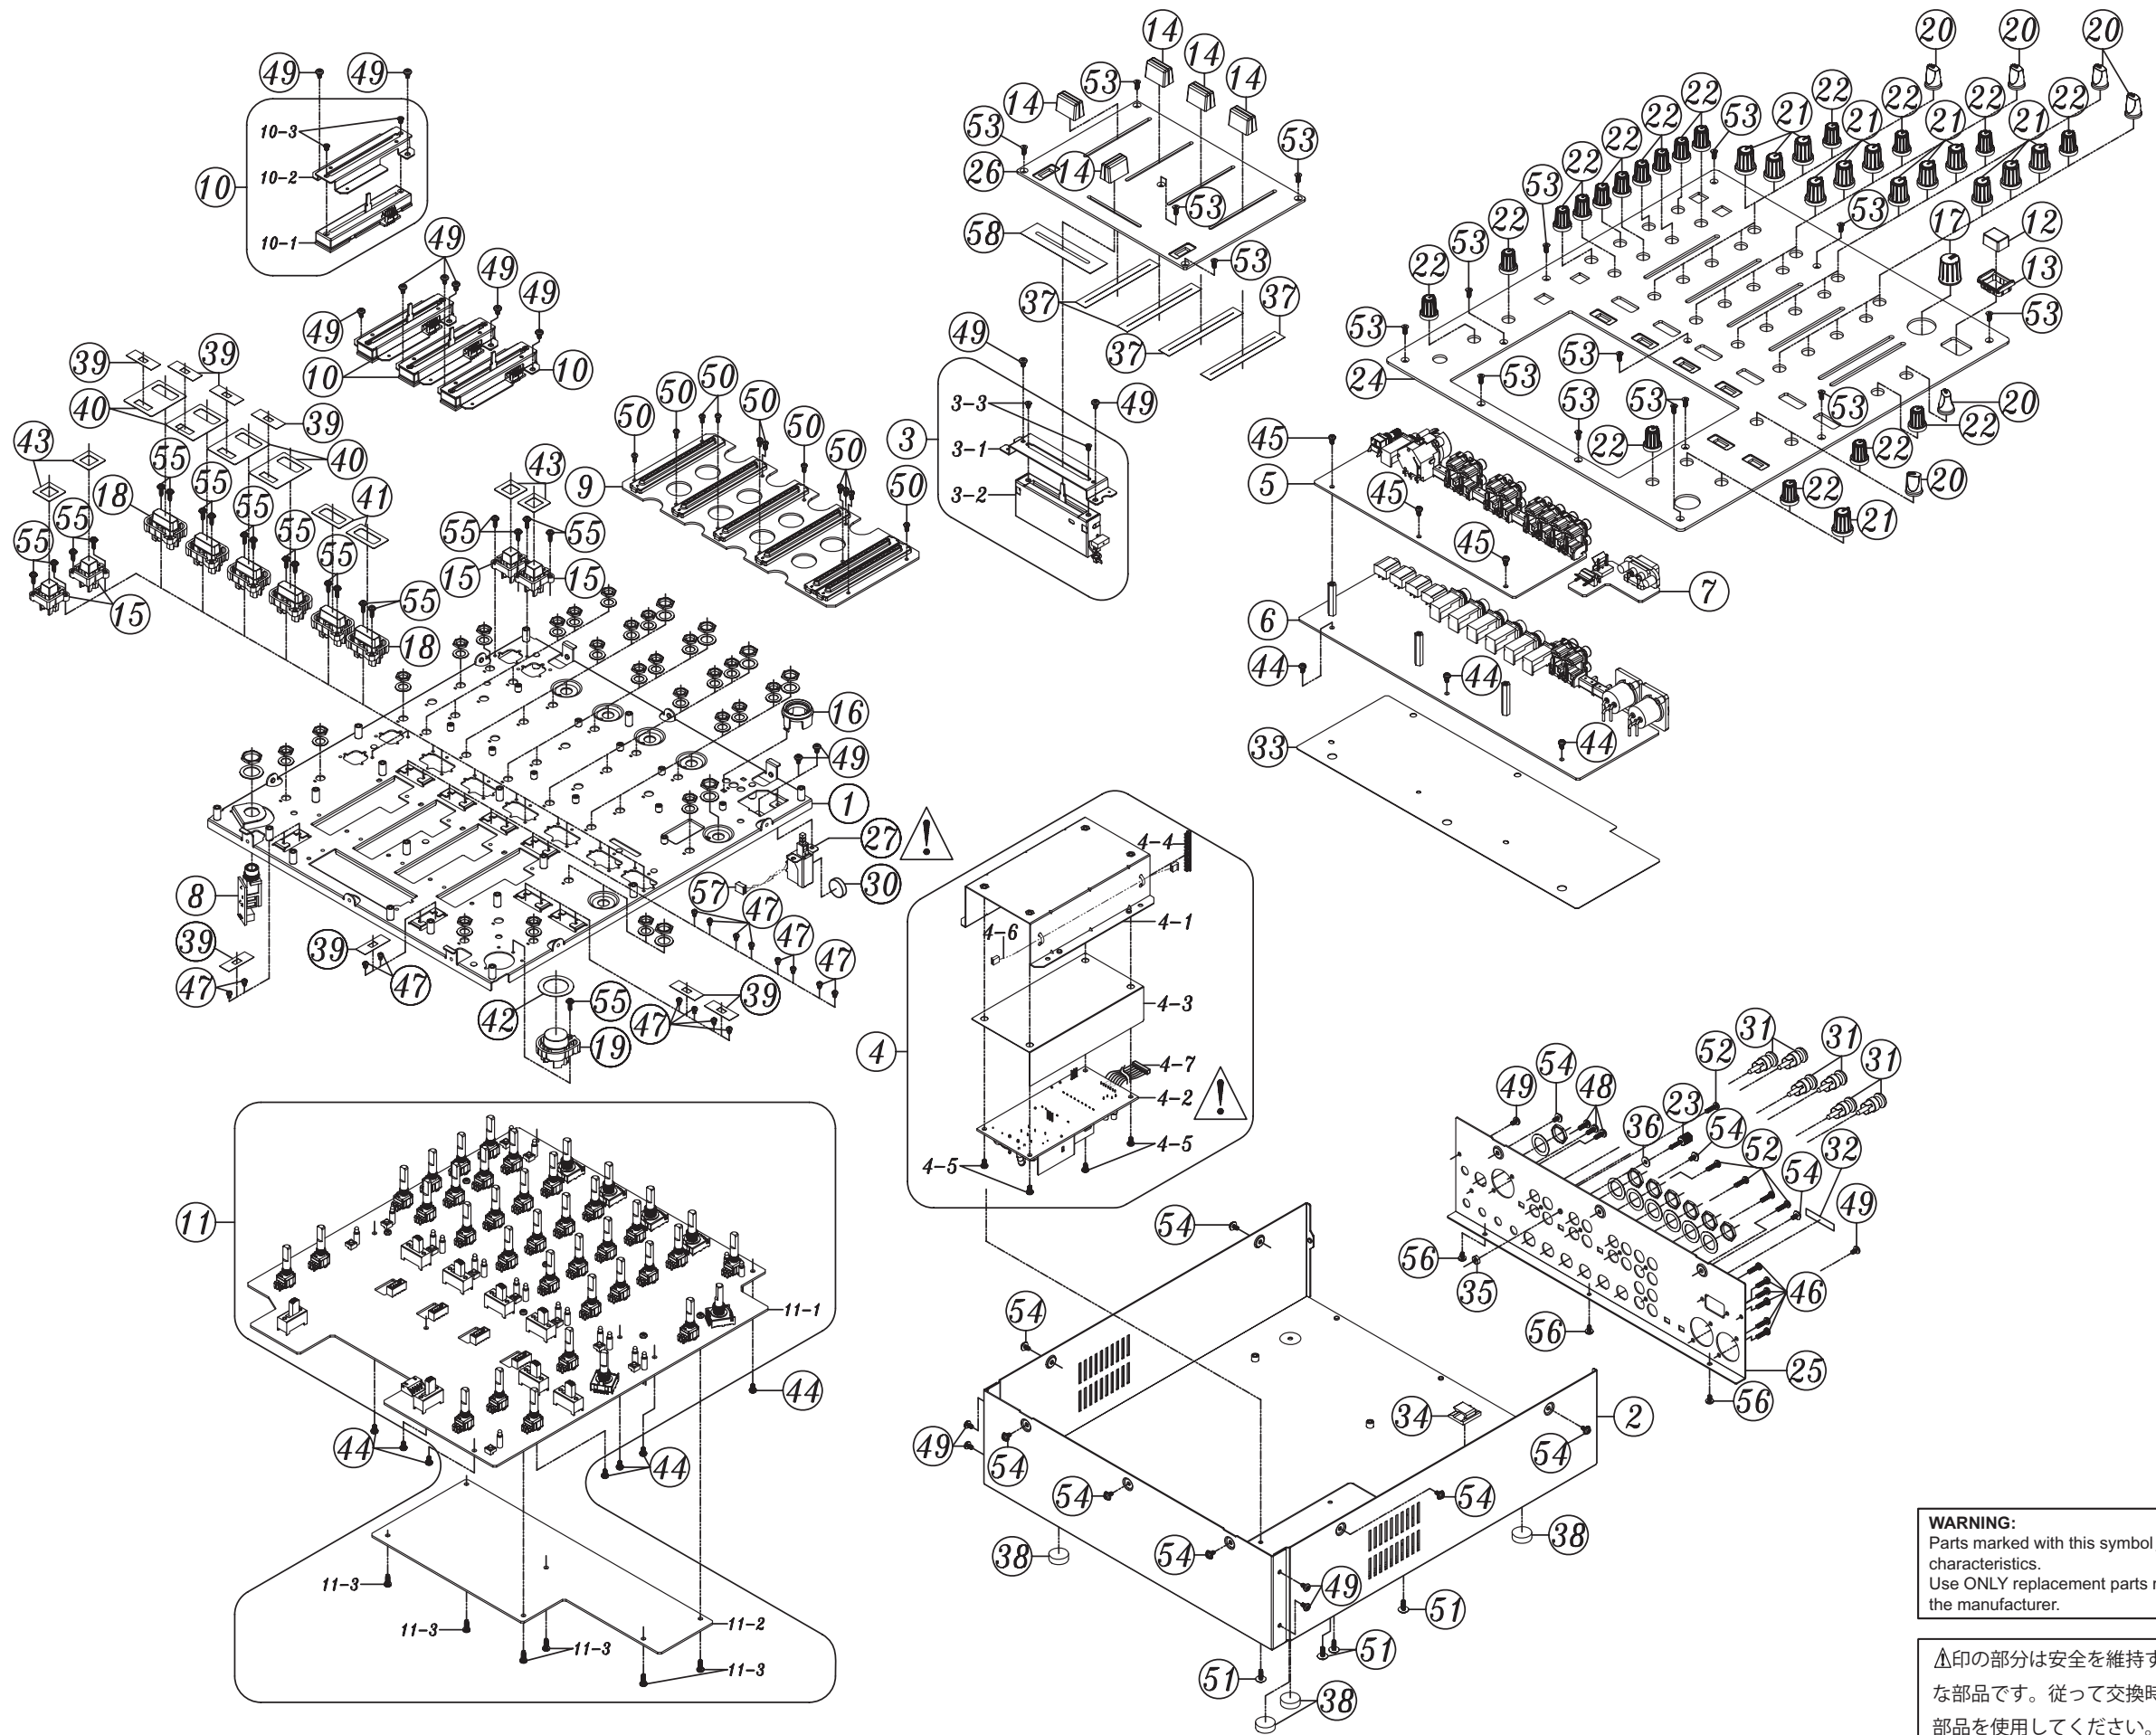

WARNING:
 Parts marked with this symbol  have critical characteristics.
 Use ONLY replacement parts recommended by the manufacturer.

印の部分は安全を維持するために重要な部品です。従って交換時は必ず指定の部品を使用してください。

PARTS LIST OF EXPLODED VIEW

* Parts for which "nsp" is indicated on this table cannot be supplied.

* P.W.B. ASS'Y for which "nsp" is indicated on this table cannot be supplied. When repairing the P.W.B. ASS'Y, check the board parts table and order replacement parts.

* The parts listed below are for maintenance only, might differ from the parts used in the unit in appearances or dimensions.

Note: The symbols in the column "Remarks" indicate the following destinations.
E3: U.S.A. & Canada model E2: Europe mode

Ref. No.	Part No.	Part Name	Remarks		Q'ty	New
1	nsp	FRONT BOARD ASS'Y		703-1100-1212	1	
2	nsp	BASE ASS'Y		703-1100E2-1213	1	
3	00D9587069303	CROSS FADER & CS FIXED PLATE ASS'Y		704-900-5730	1	
3-1	-	CS TYPE FIXED PLATE		300-900-1248	1	
3-2	-	CROSS FADER(LPA-4815LT-B50KΩ)		418-900-305	1	
3-3	-	SCREW(SAE1018,ISOF,φ3*L4*P0.5)		602-SA12-414	2	
4	nsp	POWER & DIXED PLATE ASS'Y		704-X1100-8292	1	
4-1	nsp	FIXED COVER ASS'Y		703-TU3-1197B	1	
4-2	941694000780P	SWITCHING POWER(AC100/240V,47/63Hz)		411-TU3-702	1	*
4-3	nsp	ISOLATION		501-1100-2207	1	
4-4	nsp	HOLDFAST(L=250mm)		504-X1100-243	1	
4-5	nsp	SCREW(3*5 P=0.5)		602-B300-041	4	
4-6	941612000930S	3N2P 3.96 CONNECTOR WIRE(L=290mm)		404-X1100-3108	1	*
4-7	941612000940S	7P 2.5 CONNECTOR WIRE(L=120mm)		404-X1100-3106	1	*
5	nsp	IO PCB ASS'Y		704-X1100-8163	1	
6	nsp	POWER PCB ASS'Y		704-X1100-8164	1	
7	nsp	AC PCB ASS'Y	E2	704-X1100-8311	1	
7	nsp	AC PCB ASS'Y	E3	704-X1100-8165	1	
8	nsp	PHONE PCB ASS'Y		704-X1100-8166	1	
9	nsp	LEVEL METER PCB ASS'Y		704-X1100-8168	1	
10	941674000830P	CH VR FIXED PLATE & CH FADER PCB ASS'Y		704-X1100-8170	4	*
10-1	-	CH FADER PCB ASS'Y		704-X1100-8167	4	
10-2	-	CH FIXED PLATE		300-1100-1647	4	
10-3	-	SCREW(SAE1018,ISOF,φ3*L4*P0.5)		602-SA12-414	8	
11	nsp	MIXER & TRANSFER PCB ASS'Y		704-X1100-8185	1	
11-1	-	MIXER PCB ASS'Y		704-X1100-8161	1	
11-2	-	TRANSFER PCB ASS'Y		704-X1100-8162	1	
11-3	-	SCREW(SAE1018,φ3*L8*P0.5)		602-2002-085	6	
12	00D9410057301	POWER KNOB		100-HDJ2000-1641	1	
13	90M09CW259020	KNOB PROTECTOR		100-HDJ2000-1642	1	
14	00D9587013401	PUSH KNOB		100-300-2231	5	
15	941412000790P	SQUARE KNOB		100-1100-2301A	4	*
16	00D9587046106	JACKET		100-900-2302	1	
17	00D9587046203	LARGE ROTARY KNOB(ABS)		100-900-2303	1	
18	941411000800P	CUE BUTTON		100-1100-2602	6	*
19	941412000850P	ROUND KNOB		100-1100-2603	1	*
20	941412000860P	SMALL ROTARY KNOB(ABS)		100-1100-2619	6	*
21	412510032008P	ROTARY KNOB(PP BLUE,TPR BLACK)		100-1100-2633	13	
22	412510031005P	ROTARY KNOB(PP BLUE,TPR BLACK)		100-1100-2634	18	
23	nsp	GROUND PIN		200-DJ100-231	1	
24	941402000820P	FRONT PANEL		300-1100-1643	1	*
25	941406000900P	BACK BOARD	E2	300-1100E2-1644	1	*
25	941406000910P	BACK BOARD	E3	300-1100E3-1644	1	*
26	941409001310P	VR BOARD		300-1100-1646	1	*
27	00D9580008303	POWER SW(SDDL1017U-HF,L=18)		403-A100-005	1	
30	00D9587056002	AC SAFETY CAPACITOR(0.01uF/250V,M,BULK,Y5V)		413-S250-747	1	
31	00D9587037500	RCA ADAPTOR PLUG(A028)		420-Q3433-106	6	
32	nsp	SHIPPING LABEL	E2	701-X1100E2-3655	1	
32	nsp	SHIPPING LABEL	E3	701-X1100E3-3655	1	

