

MPM-3500R

Ribbon Microphone with Ultra Low-Mass Diaphragm

User Guide

Guía del usuario

Guide d'utilisation

Guida per l'uso

Benutzerhandbuch

Box Contents

Contenido de la caja

Contenu de la boîte

Contenuti della confezione

Lieferumfang



Technical Specifications

Especificaciones técnicas

Spécifications techniques

Specifiche tecniche

Technische Daten

Type	Ribbon microphone
Polar Pattern	Dipole (Figure 8)
Frequency Response	20–20000 Hz
Sensitivity	-34 dB \pm 2 dB (0 dB = 1 V/Pa @ 1 kHz)
Impedance	Output: 200 Ω \pm 30% (@ 1 kHz) Load: \geq 1000 Ω
Self-Noise	15 dBA
Maximum SPL	135 dB (THD α 1%, 1 kHz)
Signal-to-Noise Ratio	79 dB
Power Requirement	Requirement: 48V DC phantom power Current: 3 mA
Dimensions (microphone body)	8.07" x 1.97" x 2.09" 205 x 50 x 58 mm
Weight	1.08 lbs. 0.49 kg


Polar Pattern

Patrón polar

Diagramme polaire

Figura polare

Polardiagramm

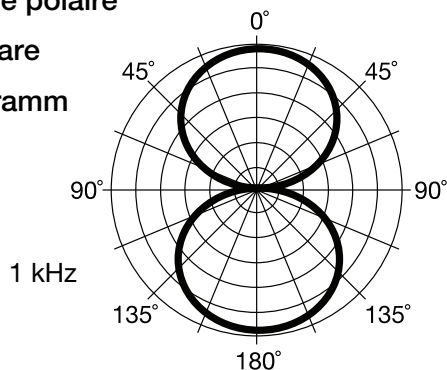

Frequency Response

Respuesta en frecuencia

Réponse en fréquence

Risposta di frequenza

Frequenzgang

