

DN-2000FMK II

Double CD Player The New Industry Standard



The DN-2000F was introduced in 1992, sporting all the basic features that DJs had requested and quickly became accepted throughout the world as the standard CD player for DJs.

The DN-2000F MKII continues this strong tradition, born from the suggestions DENON has received from DJs all over the world.

The DN-2000F MKII not only incorporates more features for convenience, it builds in even more reliability than its predecessor. With a stronger chassis for on the road mishaps, and a new state-of-the-art laser assembly for uncompromised disc tracking, the new "MKII" offers the number one feature on every professional's list - bulletproof reliability.

1 Wide Viewing Angle Display

A new LCD has broadened the angle over which the display can be viewed. The new display is also back lit for easy viewing in dark working conditions.

2 Power Switch Guard

This feature prevents accidents caused by accidentally bumping the power switch during playback, especially valuable when operating in the dark.

Instant Start

Playback begins less than 0.01 seconds after the PLAY button is pressed. Only DENON provides real instant start.

3 Pitch (%) Display

DENON's PITCH control gave you the ability to easily adjust the tempo of a song. Now the DN-2000FMKII displays pitch changes, allowing you to reproduce pitch changes with 0.1% step.


4 Variable Pitch Range of $\pm 8\%$ or $\pm 4\%$

The range over which variable pitch operates can be pre-set. The new 4% range offers greater precision when adjusting the pitch. Also, the pitch slider clicks into position when it reaches the center (0%) position.

5 Continuous / Single Play Mode Display

6 Auto Disc Holder Close System

If the Disc Holder is left open for more than one minute, it will close automatically. This is a preset item and can be enabled or disabled.

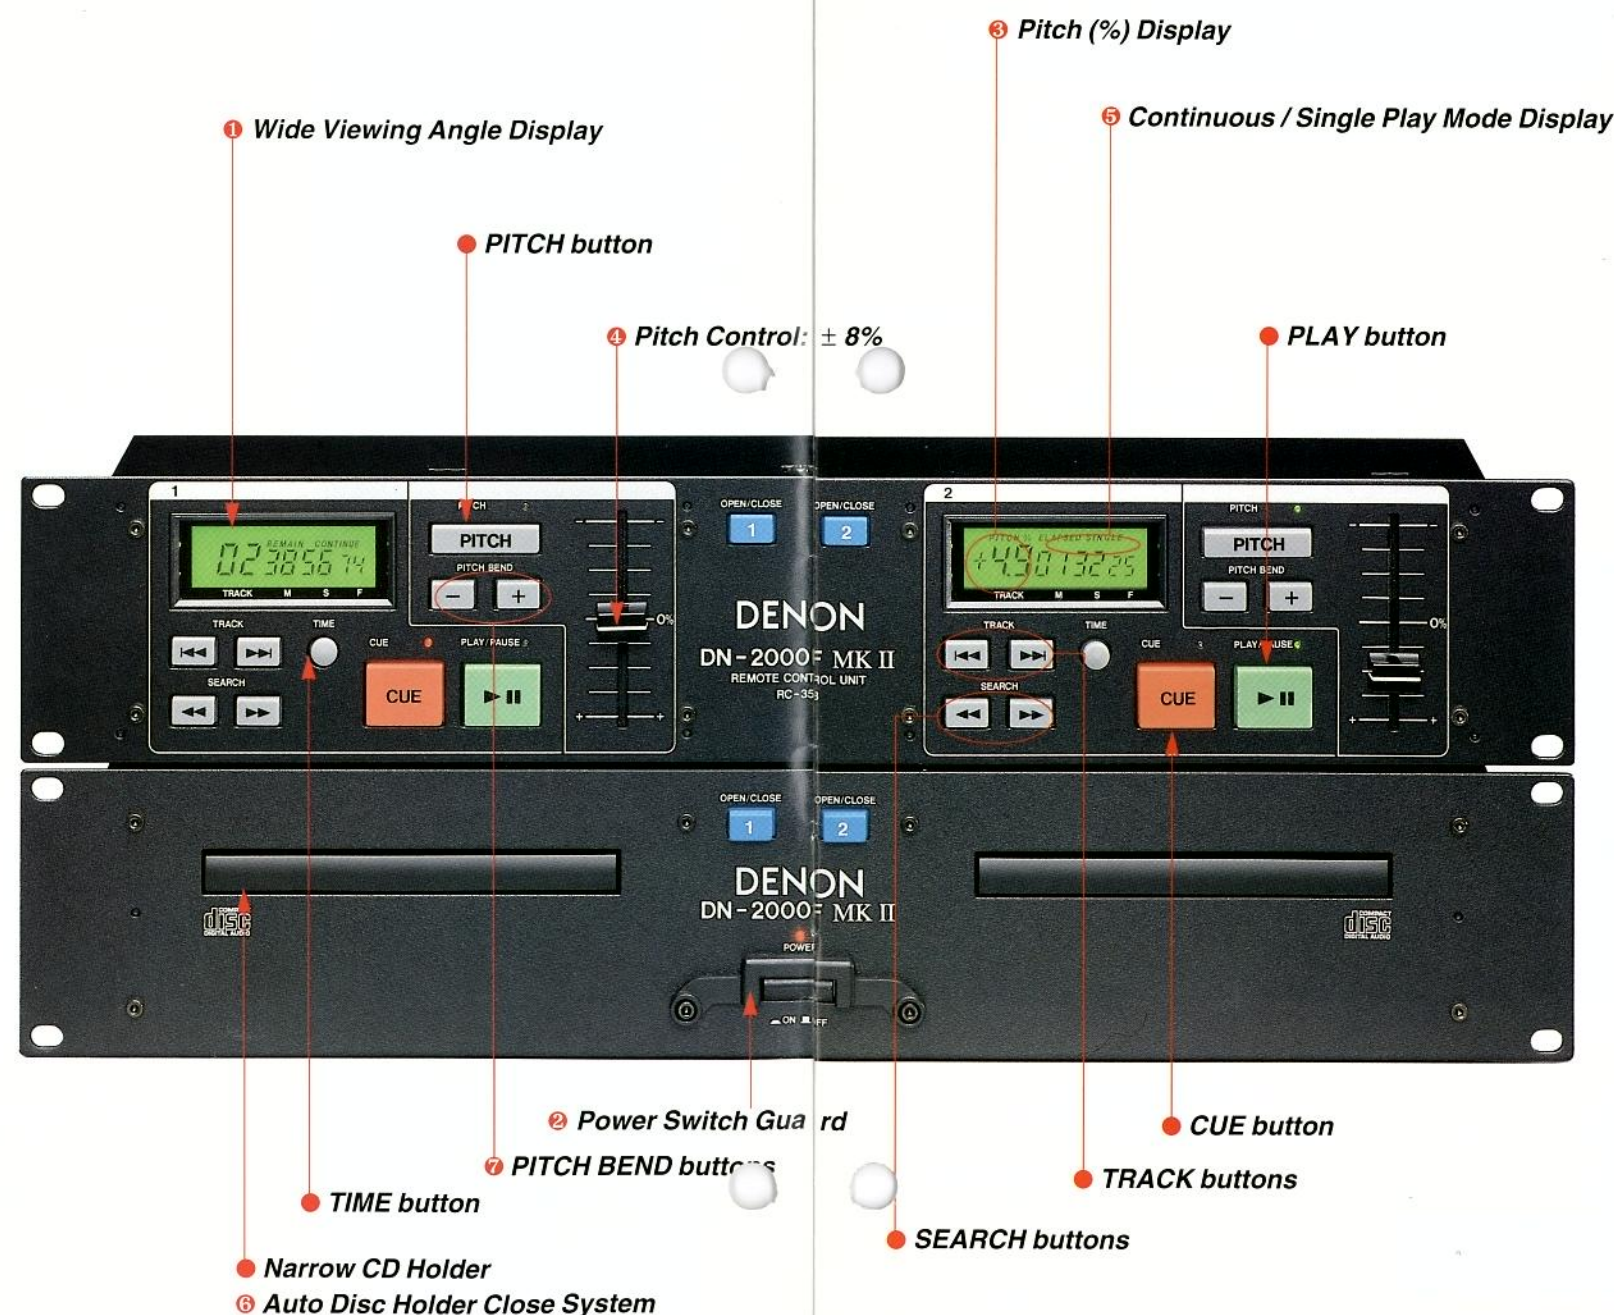

● EOM (End Of Message)

When the remaining time of a track being played becomes shorter than the preset EOM time indicator, the time display begins flashing. The EOM setting range is 0~60 seconds and is adjustable in 6 steps.

● Customised Functions

A non-volatile memory stores your favourite choices. Whenever the DN-2000FMKII is turned on, it automatically presets these operating conditions. By simply editing these presets, you can optimise the DN-2000F MKII for your specific requirements.

Start-up mode when power is ON:

- (1) ELAPSED/REMAIN of time display setting
- (2) SINGLE/CONTINUE of play mode setting
- (3) TRACK/PITCH of display setting
- (4) PITCH ON/OFF setting
- (5) Variable PITCH range of $\pm 8\%$ or $\pm 4\%$
- (6) Auto cueing detection level of -36 dB to $-\infty$
- (7) EOM time of 0~60 sec
- (8) Auto Disc holder close ON/OFF

7 PITCH BEND

Once beats-per-minute of two tracks are matched with the Pitch Control, turn to the PITCH BEND to help you get the bass beats in sync. Press the + or - button to change speed momentarily. The longer you hold the button in, the more it changes. Releasing the button restores it back to the pitch speed set by the Pitch Control sliding fader. The PITCH BEND effect will not change the reference pitch set by the sliding fader.

● Feet on Remote Control unit for Table Top use

● Long Remote connecting cable (3m/9.8feet) with L shaped connectors

● 19 inch Rack Mountable