

RANE SL3




3-deck interface for professional DJs

The SL3 connects one, two or three standard vinyl or CD turntables to your computer and the mixer of your choice. This intuitive system replicates the traditional DJing experience for “real feel” usability. With unparalleled performance and stability, you’ll soon see why thousands of DJs worldwide choose Rane with Serato software.

The auxiliary input provides a live input feed for creative sampling, recording your set or using a third vinyl turntable or CD deck. The auxiliary output delivers a third deck or the SP-6 sample player output to a dedicated input on your mixer. Studio-grade phono preamps and 24-bit audio processing deliver exceptional sound.

The SL3 includes two 12” Serato Control records and two Control CDs, USB cable, and RCA audio cables to your mixer. An international power supply with country adaptors is included to insure continuous signal and easy transfer when unplugging USB between DJs.

Galvanic isolation guarantees audio is actively isolated from USB and power. The RIAA phono equalization is extremely accurate, for the best sound from your vinyl. 3Vrms inputs are accepted from CD decks without clipping, and outputs 3Vrms go to the mixer without clipping; other interfaces can’t handle this much signal. A list of supported MIDI controllers is at serato.com.

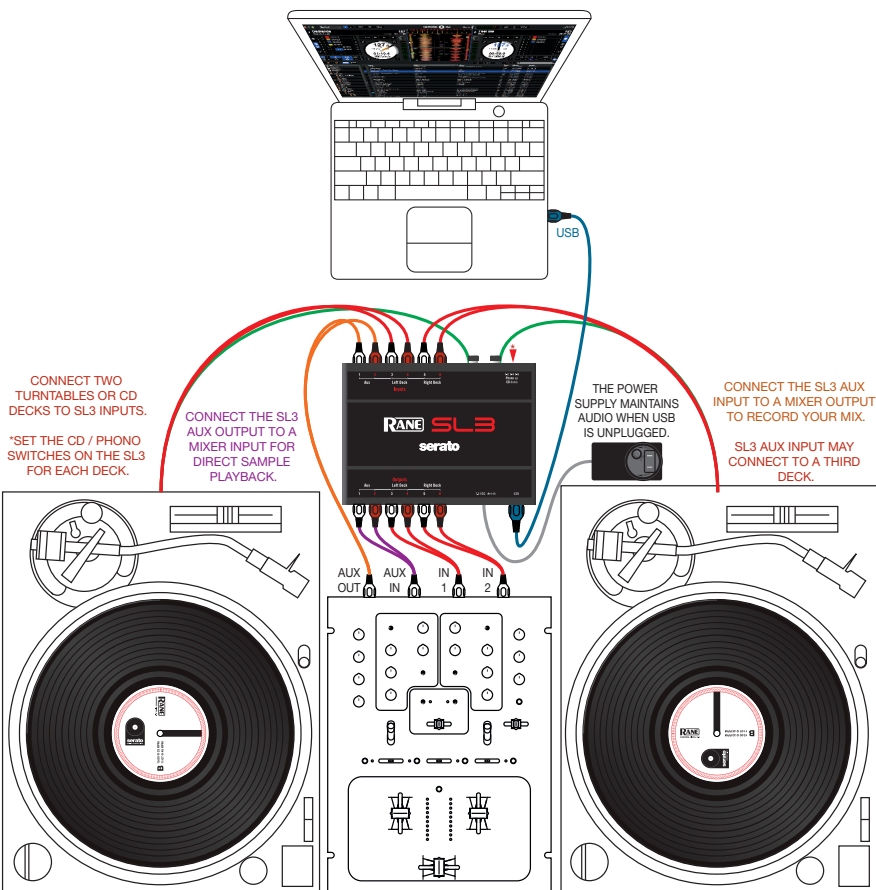

SL3 feature enhancements include:

- Supports up to three turntables or CD decks switchable in any combination.
- Aux Input for Live Mix Recording or a third deck.
- Aux Output can be assigned to the Serato DJ SP-6 Sample Player or a third deck.
- 6-in 6-out sound card with any software supporting ASIO or Core Audio.
- Software and driver-switchable Direct Thru connections for regular vinyl or CD.
- External power supply included to provide Direct Thrus without USB power from a computer.



serato DJ

RANE

The SL3 includes Serato DJ with 2 Serato Control Vinyl and 2 Serato Control CDs.

SL3 Specifications

All specifications typical unless otherwise stated	
Computer interface	USB 2.0 High Speed
USB Power Requirement	400 mA, 5.0 Volts
USB Audio Channels	Six Record and Six Playback
External Power Supply Included	100-240 VDC input, 7.5 VDC output
Converters	24-bit / 44.1 kHz or 48 kHz sample rate
DAC Dynamic Range	104 dB, A-weighted
Line Thru Dynamic Range	101 dB, A-weighted
Phono Thru Dynamic Range	98 dB, A-weighted
THD+N	0.009% at 1 kHz at 2 Vrms
Frequency Response	20 Hz to 20 kHz +0, -3 dB
All Inputs Phono or Line Level	Switchable
Inputs	Unbalanced RCA
.....Line Gain	Unity
.....Maximum Input / Output	3 Vrms
.....Phono Gain	29 dB
.....Maximum Phono Input	106 mV
.....Phono Sensitivity	Adjustable 2.5 mV to 10 mV
Kensington Security Slot	Both sides of unit
Unit: Conformity	CE, FCC
.....Unit Size	6.8" x 5" x 1.3" (17.3 x 12.6 x 3.3 cm)
Shipping: Size	14" x 14" x 4" (36 x 36 x 10 cm)
.....Weight	5 pounds (2 kg)

ASIO & Core Audio Drivers

These included drivers allow the SL3 to act as a 6-in 6-out USB external sound card for use with multiple third-party software clients supporting Core Audio (Mac) or ASIO (Windows).

Serato DJ

Rane is pleased to announce that the SL3 which previously included Serato Scratch Live software is now fully supported by Serato DJ software. DJs currently using Serato Scratch Live have the option to migrate to the new and improved Serato DJ free of charge. If you're familiar with Scratch Live, the transition to Serato DJ is easy and intuitive.

Computer Requirements

Before purchasing a Mac or PC, please check serato.com for best results with the latest version of Serato DJ.

Included in the Box

The Rane SL3 is only sold as part of a complete package. The box includes:

- SL3 hardware interface
- 4 rubber feet for the SL3
- USB cable
- 4 stereo RCA cables
- Printed color manuals
- 2 Control Vinyl Records
- 2 Control CDs
- Serato DJ software install disc
- External universal power supply with country adaptors.



Serato Control

Mix files from your computer hard drive using Serato Control Vinyl, Serato Control CD or approved USB Controllers. The Serato Control Vinyl and Control CDs each contain the Serato NoiseMap™ Control Tone, a unique control signal which allows Serato DJ or Scratch Live to track the motion of the record, simulating the same movement with digital audio.

serato.com

Features are being added and improved, and the latest version of Serato DJ or Scratch Live is a free download. The Forum at serato.com is the best place for technical support and performance tips from thousands of other DJs.

whitelabel.net

The Serato Whitelabel Delivery Network is a unique system that allows record labels to digitally deliver promotional releases directly to Serato DJs. To download Whitelabel audio files and sign up for updates on the latest promotional releases, visit whitelabel.net.

dj.rane.com

Visit the Rane DJ website for the most up-to-date information on all Rane hardware, manuals, accessories, support, community, newsletter and the blog.

© 2016 Rane Corporation. Accelerated-Slope, FlexFX and Active Crossfader are trademarks of Rane Corporation. All rights reserved. Windows 7, 8 and 10 are either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries. Apple, Mac, Macintosh and iTunes are trademarks of Apple Computer, Inc., registered in the US and/or other countries. Serato DJ and Scratch Live are trademarks of Serato. Lexan is a registered trademark of General Electric. iZotope is a trademark of iZotope, Inc. in the United States and other countries.

6-2016